

# Building a Test Case


## Search Building Test Case section

A test case is a set of HTTP/S requests generated by a user's clicks or actions that represent a specific usage scenario. The test case represents an impact on website performance induced by a single user. In some load testing literature, a test case is called **Script**.

A test can have one or several test cases. Every test case is created and configured independently. The test case can be instantiated in StresStimulus by:

- Recording browser or other web client actions as a new test case.
- Creating from a set of HTTP sessions captured by a proxy.
- Importing a test case from a different test.
- Opening a previously-stored test.

All steps of recording and configuring a test case are performed on the **Main** tab on the first two sections in the Workflow Tree: **Record Test Case** and **Build Test Case**.

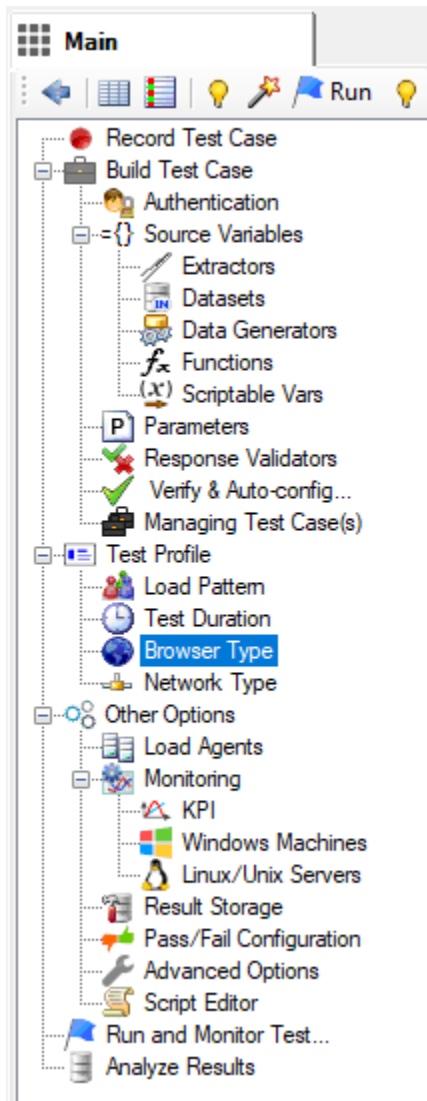

[Recording Test Case](#)

[Other Methods of Creating a Test Case](#)

[Post recording steps](#)

[Parameterizing dynamic tests](#)

**Test Case Object Properties**

**Other Test Case Elements**

**Managing Test Case(s)**